
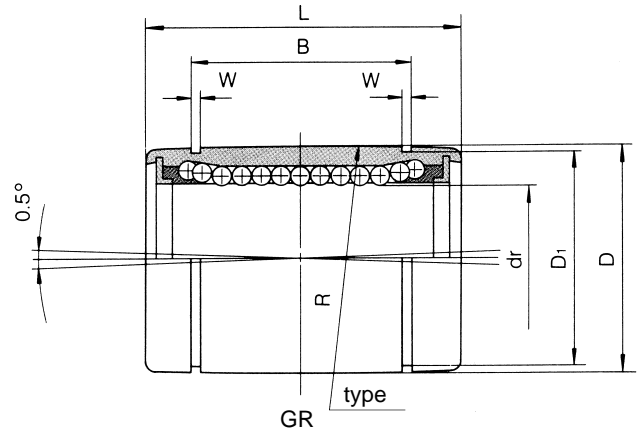


# SW TYPE


## – Standard Type –

This type is an inch dimension series mainly used in the U.S.

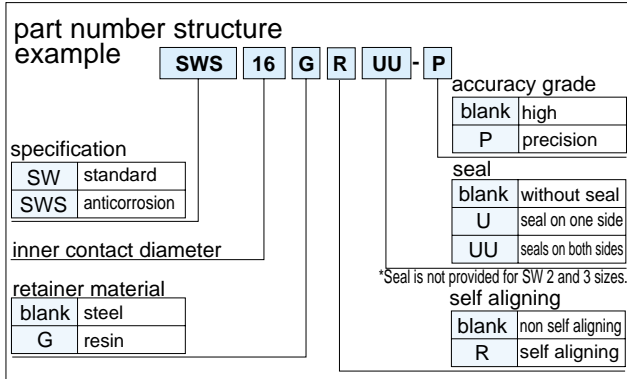

part number				number of ball circuits	dr					
standard		anticorrosion			tolerance inch/ $\mu$ m		D			
steel retainer	resin retainer	stainless retainer	resin retainer		inch mm	precision	high	inch mm	tolerance inch/ $\mu$ m	
–	–	–	<b>SWS 2</b>	<b>SWS 2G</b>	4	.1250 3.175	–	0 –.00035	.3125 7.938	0 –.00040
–	–	–	<b>SWS 3</b>	<b>SWS 3G</b>	4	.1875 4.763	–	0 – 8	.3750 9.525	0 – 9
<b>SW 4</b>	<b>SW 4G</b>	<b>SW 4GR</b>	<b>SWS 4</b>	<b>SWS 4G</b>	3*	.2500 6.350	–	0 –	.5000 12.700	0 –.00045 0 –11
<b>SW 6</b>	<b>SW 6G</b>	<b>SW 6GR</b>	<b>SWS 6</b>	<b>SWS 6G</b>	4	.3750 9.525	–.00025	0 –.00040	.6250 15.875	0 –
<b>SW 8</b>	<b>SW 8G</b>	<b>SW 8GR</b>	<b>SWS 8</b>	<b>SWS 8G</b>	4	.5000 12.700	0 – 6	0 – 9	.8750 22.225	–.00050 0
<b>SW10</b>	<b>SW10G</b>	<b>SW10GR</b>	<b>SWS10</b>	<b>SWS10G</b>	4	.625 15.875	–	–	1.1250 28.575	–13
<b>SW12</b>	<b>SW12G</b>	<b>SW12GR</b>	<b>SWS12</b>	<b>SWS12G</b>	5	.7500 19.050	–.00030	0 –.00040	1.2500 31.750	0 –.00065
<b>SW16</b>	<b>SW16G</b>	<b>SW16GR</b>	<b>SWS16</b>	<b>SWS16G</b>	6	1.0000 25.400	0 – 7	0 – 10	1.5625 39.688	0 –16
<b>SW20</b>	<b>SW20G</b>	<b>SW20GR</b>	<b>SWS20</b>	<b>SWS20G</b>	6	1.2500 31.750	–.00035	0 –.00050	2.0000 50.800	0 –.00075
<b>SW24</b>	<b>SW24G</b>	<b>SW24GR</b>	<b>SWS24</b>	<b>SWS24G</b>	6	1.5000 38.100	0 –	0 –	2.3750 60.325	0 –19
<b>SW32</b>	<b>SW32G</b>	<b>SW32GR</b>	<b>SWS32</b>	<b>SWS32G</b>	6	2.0000 50.800	0 – 8	0 – 12	3.0000 76.200	0 –
<b>SW40</b>	–	–	–	–	6	2.5000 63.500	–.00040	0 –.00060	3.7500 95.250	–.00090 0
<b>SW48</b>	–	–	–	–	6	3.0000 76.200	0 – 9	0 – 15	4.50000 114.300	–22
<b>SW64</b>	–	–	–	–	6	4.0000 101.600	–.00040 –10	0 –.00080 –20	6.0000 152.400	–.00100 –25

\* 4 rows for resin retainer type.

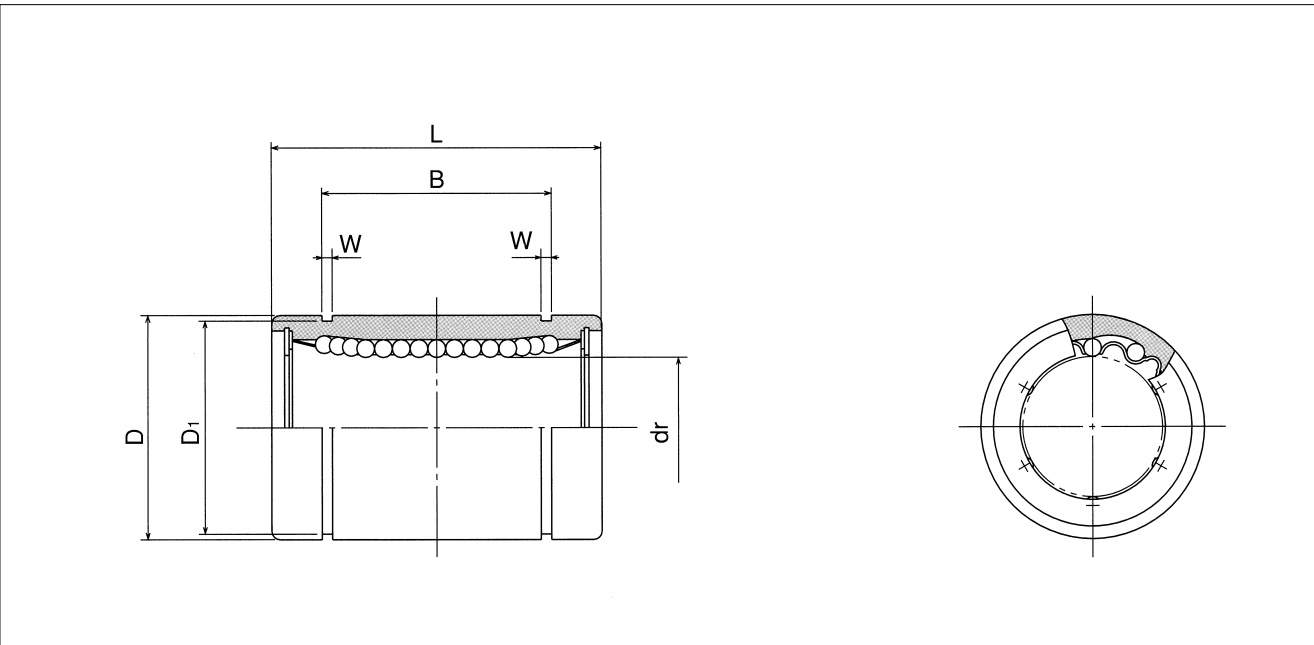

major dimensions						eccentricity		radial clearance (maximum) inch/ $\mu$ m	basic load rating		mass g	shaft diameter inch mm			
inch mm	L tolerance inch/mm	inch mm	B tolerance inch/mm	inch mm	D <sub>1</sub> inch mm	precision inch/ $\mu$ m	high inch/ $\mu$ m		dynamic C N	static Co N					
.5000 12.700	0 -.008	.3681 9.35	0 -.008	.0280 0.710	.2902 7.370	-	.0003 8	-.0001 - 2	59	76	2.8	1/8 3.175			
.5625 14.275		.4311 10.95		.0280 0.710	.3520 8.940				91	110	3.6	3/16 4.763			
.7500 19.050		.5110 12.98		.0390 0.992	.4687 11.906				206	265	9.5	1/4 6.350			
.8750 22.225	0 -.02	.6358 16.15	0 -.02	.0390 0.992	.5880 14.935	.0003 8	.0005 12	-.0001 - 3	225	314	15	3/8 9.525			
1.2500 31.750		.9625 24.46		.0459 1.168	.8209 20.853				510	784	42	1/2 12.700			
1.5000 38.100		1.1039 28.04		.0559 1.422	1.0590 26.899				774	1,180	85	5/8 15.875			
1.6250 41.275	0 -.012	1.1657 29.61	0 -.012	.0559 1.422	1.1760 29.870	.0004	.0006	-.0002	862	1,370	104	3/4 19.050			
2.2500 57.150		1.7547 44.57		.0679 1.727	1.4687 37.306				980	1,570	220	1 25.400			
2.6250 66.675		2.0047 50.92		.0679 1.727	1.8859 47.904				1,570	2,740	465	1-1/4 31.750			
3.0000 76.200	0 -.03	2.4118 61.26	0 -.03	0.859 2.184	2.2389 56.870	12	20	- 8	2,180	4,020	720	1-1/2 38.100			
4.0000 101.600		3.1917 81.07		.1029 2.616	2.8379 72.085				3,820	7,940	1,310	2 50.800			
5.0000 127.000		3.9760 100.99		.1200 3.048	3.5519 90.220				4,700	10,000	2,600	2-1/2 63.500			
6.0000 152.400	0 -.016	4.726 120.04	0 -.016	.1200 3.048	4.3100 109.474	.0007 17	.0010 25	-.0005 - 13	7,350	16,000	4,380	3 76.200			
8.0000 203.200	0 -.04	6.258 158.95	0 -.04	.1389 3.530	5.745 145.923				.0008 20	.0012 30	- 20	14,100	34,800	10,200	4 101.600

1N $\approx$ 0.225lbs 1kg $\approx$ 2.205lbs